


姿図

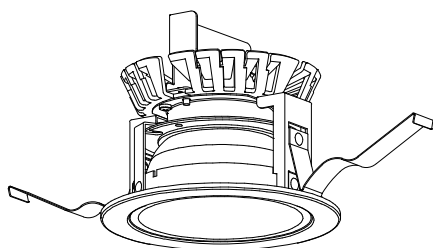

品 番	LZD-92286NWV
光 源	LED 25W Q+4000K
定格光束	1820.0 lm
1/2照度角	55 °
ビーム角	68 °

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さ H)	A 1.04 H B 1.04 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	77	72	69	77	72	69	76	72	69	75	71	68	67	
0.8	84	79	75	83	79	75	82	78	75	81	77	74	73	
1	90	85	82	89	85	81	88	84	81	86	83	80	78	
1.25	95	91	87	94	90	87	92	88	86	90	87	85	82	
1.5	99	94	91	98	94	90	95	92	89	93	90	88	85	
2	104	101	98	103	99	97	100	97	95	97	95	93	90	
2.5	108	105	102	106	103	101	103	101	99	100	98	97	93	
3	110	108	106	108	106	104	105	103	102	102	101	99	96	
4	113	111	109	111	109	107	107	106	104	104	103	102	97	
5	114	113	111	112	111	109	108	107	106	105	104	103	98	

