


姿図

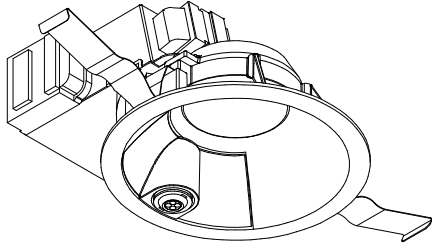

品 番	DDL-4645AW
光 源	LED 7.7W 3500K
定格光束	430.0 lm
1/2照度角	63°
ビーム角	86°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.23 H B 1.23 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率(%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		61	54	50	60	54	49	59	53	49	58	53	49	47
0.8		71	64	59	70	63	59	68	63	58	67	62	58	56
1		78	72	67	77	71	67	76	70	66	74	69	65	63
1.25		85	79	74	84	78	74	82	77	73	80	76	72	70
1.5		90	85	80	89	84	79	87	82	78	84	80	77	74
2		97	93	88	96	91	88	93	89	86	90	87	84	81
2.5		102	98	94	100	96	93	97	94	91	94	91	89	85
3		105	101	98	103	100	97	100	97	94	96	94	92	88
4		108	105	102	106	103	101	102	100	98	99	97	95	91
5		110	108	105	108	106	104	104	102	100	100	99	97	93

