


姿図

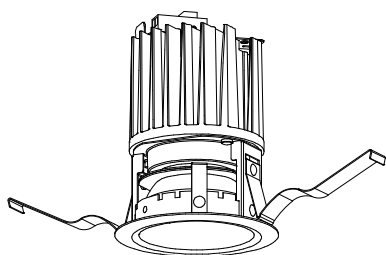

品 番	LZD-92902AWV
光 源	LED 25W Q+3500K
定格光束	1590.0 lm
1/2照度角	56 °
ビーム角	68 °

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さ H)	A 1.07 H B 1.07 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		75	69	66	74	69	66	73	69	65	72	68	65	64
0.8		82	76	72	81	76	72	79	75	72	78	74	71	69
1		88	82	79	87	82	78	85	81	78	83	80	77	75
1.25		93	88	84	92	87	84	90	86	83	88	84	82	79
1.5		97	92	88	95	91	88	93	89	87	91	88	85	83
2		102	98	95	101	97	94	98	95	93	95	93	91	88
2.5		106	103	100	104	101	99	101	99	97	98	96	95	91
3		109	106	104	107	104	102	104	102	100	100	99	97	94
4		112	109	107	110	108	106	106	104	103	102	101	100	96
5		113	111	110	111	110	108	107	106	105	104	103	102	97

