


姿図

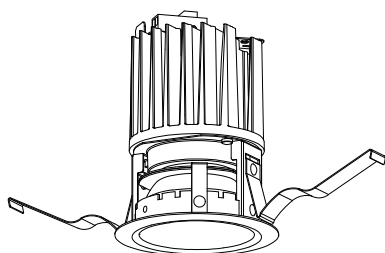

品 番	LZD-92902AW
光 源	LED 24W 3500K
定格光束	1660.0 lm
1/2照度角	55°
ビーム角	68°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.04 H B 1.04 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		75	70	66	74	69	66	73	69	66	72	68	65	64
0.8		82	76	73	81	76	72	80	75	72	78	74	71	70
1		88	83	79	87	82	79	85	81	78	84	80	77	75
1.25		93	88	84	92	87	84	90	86	83	88	85	82	80
1.5		97	92	89	96	91	88	93	90	87	91	88	85	83
2		103	99	95	101	97	94	98	95	93	96	93	91	88
2.5		106	103	100	105	101	99	101	99	97	98	96	95	91
3		109	106	104	107	104	102	104	102	100	100	99	97	94
4		112	109	107	110	108	106	106	104	103	102	101	100	96
5		113	111	110	111	110	108	107	106	105	104	103	102	97

