


姿図

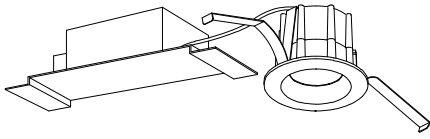

品番	DDL-4829YW
光源	LED 4.5W 2700K
定格光束	180.0 lm
1/2照度角	51°
ビーム角	64°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.96 H
	B 0.96 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
室指数	照 明 率 (× 0.01)														
0.6	66	59	55	65	59	55	64	58	55	63	58	54	53		
0.8	74	68	63	73	67	63	72	67	63	71	66	62	60		
1	81	75	71	80	75	70	79	74	70	77	72	69	67		
1.25	88	82	77	87	81	77	84	80	76	82	78	75	73		
1.5	92	87	83	91	86	82	88	84	81	86	83	80	77		
2	99	94	91	97	93	90	95	91	88	92	89	86	83		
2.5	103	99	96	101	98	95	98	95	93	95	93	91	87		
3	106	103	100	104	101	99	101	98	96	98	96	94	90		
4	109	107	104	107	105	103	104	102	100	100	99	97	93		
5	111	109	107	109	107	105	105	104	102	102	100	99	94		

