


姿図

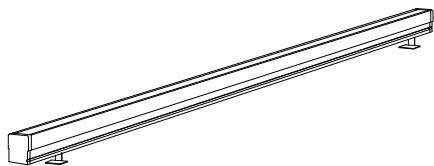

品 番	LLY-7066NUW
光 源	LED 75W 4000K
定格光束	5800.0 lm
1/2照度角	A-A' 59° B-B' 62°
ビーム角	A-A' 84° B-B' 94°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.14 H B 1.20 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		52	45	39	52	44	39	51	44	39	49	43	39	37
0.8		62	54	49	62	54	49	60	53	48	58	52	48	46
1		71	63	57	70	62	57	68	61	56	66	60	56	53
1.25		78	71	65	77	70	65	75	68	64	72	67	63	60
1.5		84	77	71	82	76	71	80	74	69	77	72	68	66
2		92	86	81	90	85	80	87	82	78	84	80	77	74
2.5		97	92	87	95	90	86	92	88	84	89	85	82	79
3		101	96	92	99	95	91	95	92	89	92	89	86	82
4		105	101	98	103	100	96	99	96	94	96	93	91	87
5		108	105	102	106	103	100	101	99	97	98	96	94	89

A-A'

B-B'

