


姿図

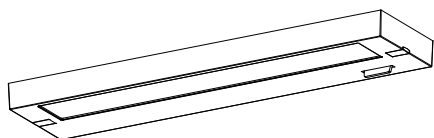

品 番	DCL-40244W
光 源	LED 6W 5000K
定格光束	480.0 lm
1/2照度角	62 °
ビーム角	102 °

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.21 H B 1.21 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		49	41	35	48	41	35	47	40	35	46	39	35	33
0.8		59	51	45	58	50	44	56	49	44	55	49	44	41
1		67	59	53	66	58	53	64	57	52	62	56	51	49
1.25		75	67	61	74	66	61	71	65	60	69	64	59	56
1.5		81	73	67	80	73	67	77	71	66	74	69	65	62
2		90	83	77	88	82	77	85	80	75	82	77	74	70
2.5		95	89	84	93	88	83	90	85	81	87	83	80	76
3		99	94	89	97	92	88	93	89	86	90	87	84	80
4		104	100	96	102	98	94	98	95	92	94	91	89	85
5		107	103	100	104	101	98	100	98	95	96	94	92	88

