


姿図

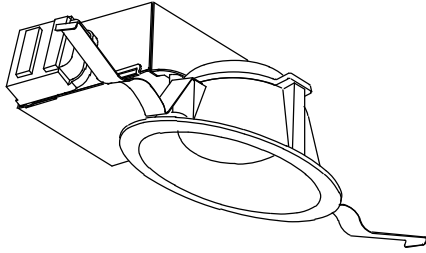

品番	DDL-5123WW
光源	LED 5000K 7.6W
定格光束	710.0 lm
1/2照度角	(A36° A' 25°) B-B' 62°
ビーム角	(A53° A' 33°) B-B' 88°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.20 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	80				70				50				30				0
	天井	壁	壁	床	天井	壁	壁	床	天井	壁	壁	床	天井	壁	壁	床	天井
天井	80	50	30	10	70	50	30	10	50	30	10	30	50	30	10	0	0
壁	50	30	10	0	30	10	0	10	10	0	0	0	0	0	0	0	0
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
室指数	照 明 率 (× 0.01)																
0.6	57	49	44	56	49	44	55	49	44	54	48	44	42				
0.8	67	60	54	66	59	54	65	58	54	63	58	53	51				
1	75	68	63	74	68	63	72	66	62	71	65	61	59				
1.25	83	76	71	81	75	70	79	74	69	77	72	69	66				
1.5	88	82	77	87	81	76	84	79	75	82	77	74	71				
2	96	90	86	94	89	85	91	87	83	88	85	82	79				
2.5	100	96	92	98	94	91	95	92	89	92	89	87	83				
3	103	99	96	102	98	95	98	95	92	95	92	90	86				
4	107	104	101	105	102	99	101	99	96	98	96	94	90				
5	109	106	104	107	105	102	103	101	99	99	98	96	91				

