


姿図

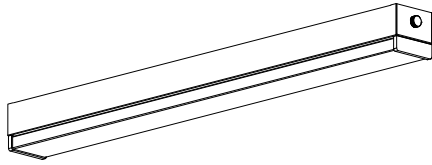

品番	DCL-40596A
光源	LED 24W 3500K
定格光束	2390 lm
1/2照度角	67°
ビーム角	118°

器具効率	100.0 %
上方光束	10.2 %
下方光束	89.8 %
器具間隔 最大限 (取付高さH)	A 1.32 H
	B 1.32 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
室指数	照 明 率 ( × 0.01 )														
0.6	44	35	29	42	35	29	40	33	28	38	32	28	25		
0.8	53	44	38	52	44	38	49	42	37	47	40	35	32		
1	61	52	46	60	51	45	56	49	44	53	47	42	39		
1.25	69	60	54	67	59	53	63	56	51	60	54	49	45		
1.5	75	67	60	73	65	59	68	62	57	65	59	55	50		
2	83	76	70	81	74	69	76	70	66	72	67	63	58		
2.5	89	82	77	86	80	75	81	76	72	76	72	69	63		
3	93	87	82	90	85	80	85	80	77	80	76	73	67		
4	98	93	89	95	91	87	89	86	83	84	81	78	72		
5	102	97	94	98	95	91	92	89	86	87	84	82	75		

