

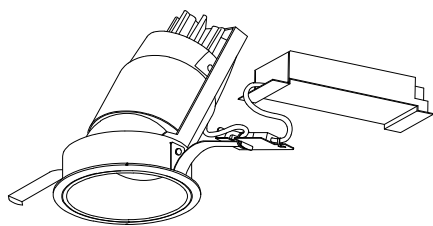


姿図

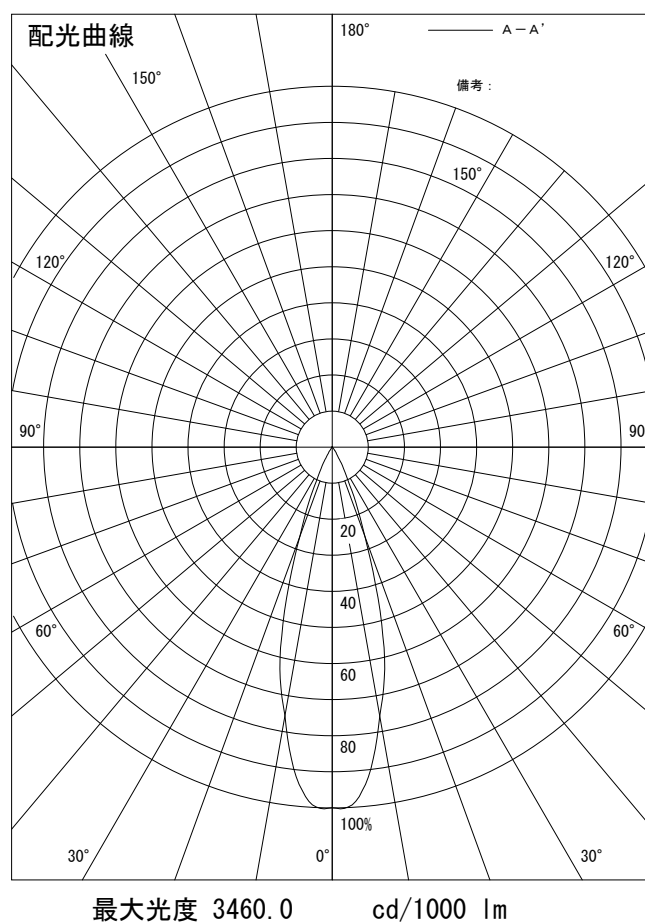


品 番	LZD-91821FW_2700K
光 源	LED 26W 5700K~2700K
定格光束	620.0 lm
1/2照度角	29°
ビーム角	32°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0		
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0		
下方光束	100.0	%		床	20			20			20			20			0		
			室指数	照 明 率 (× 0.01)															
				0.6	83	79	76	83	79	76	82	78	76	81	78	75	74		
器具間隔 最大限 (取付高さH)	A	0.53 H		0.8	89	84	81	88	84	81	87	83	80	86	82	80	78		
	B	0.53 H		1	94	90	86	93	89	86	92	88	85	90	87	85	83		
				1.25	98	94	91	97	93	90	95	92	89	93	91	88	86		
保 守 率				1.5	101	97	94	100	96	94	98	95	92	96	93	91	89		
			良	0.67		2	106	103	100	105	102	99	102	99	97	99	97	96	93
			中	0.63		2.5	109	107	104	108	105	103	105	103	101	102	100	99	96
						3	112	110	108	110	108	106	107	105	104	104	102	101	98
			否	0.56		4	114	112	111	112	111	109	108	107	106	105	104	103	99
						5	115	114	113	113	112	111	109	109	108	106	105	105	100

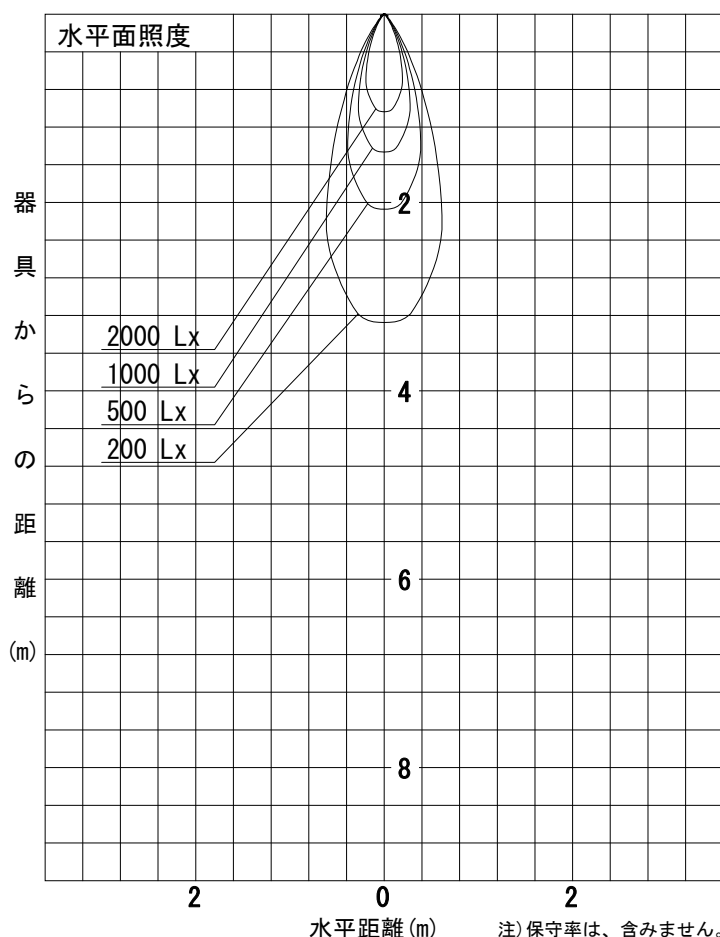

姿図

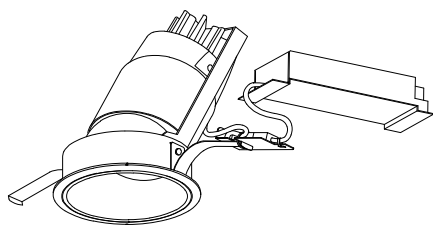

品 番	LZD-91821FW_5700K
光 源	LED 26W 5700K~2700K
定格光束	760.0 lm
1/2照度角	29°
ビーム角	30°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
				壁	50	30	10	50	30	10	50	30	10	50	30	10	0
				床	20			20			20			20			0
上方光束	0.0	%	室指数	照 明 率 (× 0.01)													
下方光束	100.0	%	0.6	83	79	76	83	79	76	82	78	76	81	78	75	74	
器具間隔 最大限 (取付高さH)	A	0.53 H	0.8	89	84	81	88	84	81	87	83	80	86	82	80	78	
	B	0.53 H	1	94	90	87	93	89	86	92	88	85	90	87	85	83	
			1.25	98	94	91	97	93	90	95	92	89	93	91	88	86	
保 守 率			1.5	101	97	94	100	96	94	98	95	92	96	93	91	89	
			2	106	103	100	105	102	99	102	99	98	99	97	96	93	
			2.5	109	107	104	108	105	103	105	103	101	102	100	99	96	
			3	112	110	108	110	108	106	107	105	104	104	102	101	98	
			4	114	112	111	112	111	109	108	107	106	105	104	103	99	
			5	115	114	113	113	112	111	109	109	108	106	105	105	100	

