


姿図

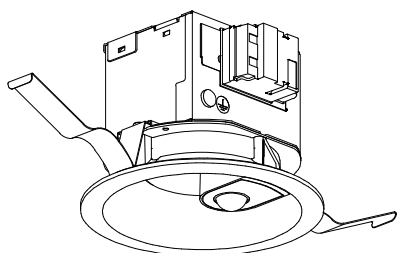

品 番	DDL-5394WW
光 源	LED 5.2W 5000K
定格光束	460.0 lm
1/2照度角	(A31° A' 22°) B-B' 64°
ビーム角	(A41° A' 25°) B-B' 90°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.25 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		60	54	49	60	53	49	59	53	49	58	52	48	47
0.8		70	63	58	69	63	58	68	62	58	66	61	57	55
1		78	71	66	77	71	66	75	70	65	73	69	65	62
1.25		85	79	74	84	78	73	82	76	72	79	75	72	69
1.5		90	84	79	89	83	79	86	81	78	84	80	77	74
2		97	92	88	96	91	87	93	89	85	90	87	84	81
2.5		102	97	94	100	96	92	97	93	90	94	91	88	85
3		105	101	98	103	99	96	99	97	94	96	94	92	88
4		108	105	102	106	103	101	102	100	98	99	97	95	91
5		110	108	105	108	106	103	104	102	100	100	99	97	93

