


姿図

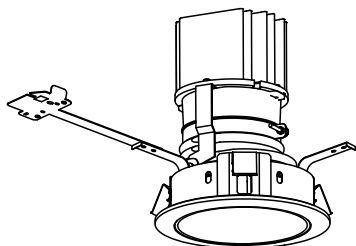

品番	LLD-7061YUM
光源	LED 39W 3000K
定格光束	2100.0 lm
1/2照度角	19°
ビーム角	18°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.33 H
	B 0.33 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
室指数	照 明 率 ( × 0.01 )														
0.6	84	80	77	84	80	77	83	79	76	82	79	76	75		
0.8	90	85	82	89	85	82	88	84	81	87	83	81	79		
1	95	91	87	94	90	87	93	89	86	91	88	86	84		
1.25	99	95	92	98	94	91	96	93	90	94	92	89	87		
1.5	102	98	95	101	98	95	99	96	93	97	94	92	90		
2	107	104	101	106	103	100	103	101	99	100	99	97	94		
2.5	111	108	106	109	107	105	106	104	102	103	101	100	97		
3	113	111	109	111	109	108	108	106	105	105	104	103	99		
4	115	114	112	113	112	111	110	109	108	106	105	105	100		
5	117	116	114	115	114	113	111	110	109	107	107	106	101		

