


姿図

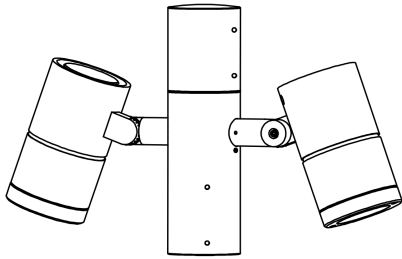

| | |
|--------|-----------------|
| 品番 | LLP-7040NUME_1灯 |
| 光源 | LED 26W 4000K |
| 定格光束 | 1530.0 lm |
| 1/2照度角 | 14° |
| ビーム角 | 14° |

| | |
|------------------------|----------------------|
| 器具効率 | 100.0 % |
| 上方光束 | 0.0 % |
| 下方光束 | 100.0 % |
| 器具間隔 最大限 (取付高さH) | A 0.25 H B 0.23 H |
| 保守率 | 良 0.69 |
| | 中 0.67 |
| | 否 0.63 |

| 反射率 (%) | 天井 | 80 | | | 70 | | | 50 | | | 30 | | | 0 |
|---------|----|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 壁 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| 床 | | 20 | | | 20 | | | 20 | | | 20 | | | 0 |
| 室指数 | | 照 明 率 (× 0.01) | | | | | | | | | | | | |
| 0.6 | | 85 | 80 | 77 | 84 | 80 | 77 | 83 | 79 | 77 | 82 | 79 | 76 | 75 |
| 0.8 | | 90 | 85 | 82 | 89 | 85 | 82 | 88 | 84 | 81 | 87 | 83 | 81 | 79 |
| 1 | | 95 | 91 | 88 | 94 | 90 | 87 | 93 | 89 | 87 | 91 | 88 | 86 | 84 |
| 1.25 | | 100 | 95 | 92 | 98 | 95 | 92 | 96 | 93 | 91 | 95 | 92 | 90 | 87 |
| 1.5 | | 103 | 99 | 96 | 101 | 98 | 95 | 99 | 96 | 94 | 97 | 94 | 92 | 90 |
| 2 | | 108 | 104 | 102 | 106 | 103 | 101 | 103 | 101 | 99 | 101 | 99 | 97 | 94 |
| 2.5 | | 111 | 108 | 106 | 109 | 107 | 105 | 106 | 104 | 103 | 103 | 102 | 100 | 97 |
| 3 | | 113 | 111 | 109 | 112 | 110 | 108 | 108 | 107 | 105 | 105 | 104 | 103 | 99 |
| 4 | | 116 | 114 | 113 | 114 | 112 | 111 | 110 | 109 | 108 | 107 | 106 | 105 | 101 |
| 5 | | 117 | 116 | 115 | 115 | 114 | 113 | 111 | 110 | 110 | 108 | 107 | 106 | 102 |

