


姿図

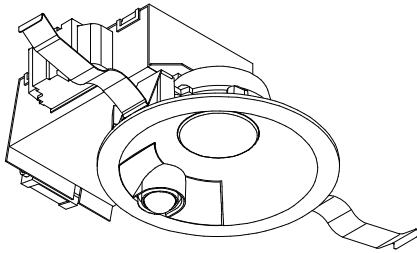

品番	DDL-4496AS
光源	LED 7.7W 3500K
定格光束	460.0 lm
1/2照度角	(A29° A' 29°) B-B' 59°
ビーム角	(A44° A' 39°) B-B' 88°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.14 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井				70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床				20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	56	48	43	55	48	43	54	47	43	53	47	43	41	
0.8	66	59	53	65	58	53	64	58	53	62	57	52	50	
1	75	67	62	74	67	62	72	66	61	70	65	61	58	
1.25	82	76	70	81	75	70	79	73	69	77	72	68	66	
1.5	88	81	76	86	81	76	84	79	75	81	77	74	71	
2	95	90	86	94	89	85	91	87	83	88	85	82	78	
2.5	100	95	92	98	94	91	95	92	88	92	89	87	83	
3	103	99	96	102	98	95	98	95	92	95	92	90	86	
4	107	104	101	105	102	99	101	99	96	98	96	94	90	
5	109	106	104	107	105	102	103	101	99	99	98	96	91	

