


姿図



品 番	DDL-5362AW
光 源	LED7.6W 3500K
定格光束	610.0 lm
1/2照度角	62°
ビーム角	96°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	100.0	%		床	20			20			20			20			0
			室指数	照 明 率 (× 0.01)													
			0.6	52	44	39	51	44	39	50	43	39	49	43	38	37	
器具間隔 最大限 (取付高さH)	A	1.20 H	0.8	63	55	49	62	54	49	60	53	48	59	53	48	46	
	B	1.20 H	1	71	63	57	70	63	57	68	62	57	66	60	56	54	
			1.25	79	71	66	78	71	65	75	69	64	73	68	64	61	
保 守 率			1.5	85	78	72	83	77	72	80	75	70	78	73	69	66	
			2	93	87	82	91	86	81	88	83	79	85	81	78	75	
			2.5	98	93	88	96	91	87	93	89	85	90	86	83	80	
			3	101	97	93	100	95	92	96	93	90	93	90	87	83	
			4	106	102	99	104	100	97	100	97	94	96	94	92	87	
			5	108	105	102	106	103	101	102	100	98	98	96	95	90	

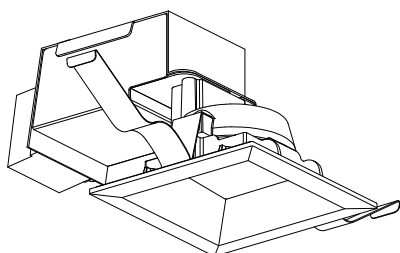