


姿図

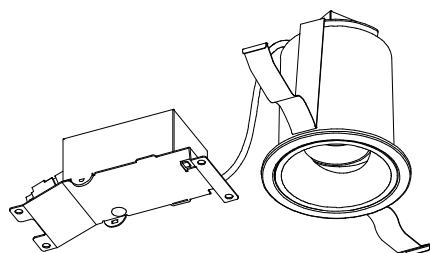

品 番	DDL-4914YBG
光 源	LED 5.8W 2700K
定格光束	300.0 lm
1/2照度角	25°
ビーム角	26°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.44 H B 0.44 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	83	79	76	83	79	76	82	78	76	81	78	75	74	
0.8	89	84	81	88	84	81	87	83	80	85	82	80	78	
1	94	90	86	93	89	86	91	88	85	90	87	85	83	
1.25	98	94	91	97	93	90	95	92	89	93	90	88	86	
1.5	101	97	94	100	96	94	98	95	92	95	93	91	88	
2	106	103	100	104	102	99	102	99	97	99	97	96	93	
2.5	109	107	104	108	105	103	104	103	101	102	100	99	95	
3	112	109	108	110	108	106	106	105	104	103	102	101	98	
4	114	112	111	112	111	109	108	107	106	105	104	103	99	
5	115	114	113	113	112	111	109	109	108	106	105	105	100	

