


姿図

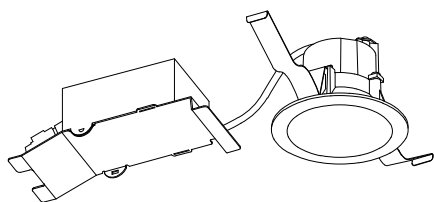

品 番	DDL-4752AWG
光 源	LED 5.8W 3500K
定格光束	400.0 lm
1/2照度角	25°
ビーム角	26°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.45 H B 0.45 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		79	75	71	79	74	71	78	74	71	77	73	71	69
0.8		86	81	77	85	80	77	84	79	76	82	79	76	74
1		91	87	83	90	86	83	89	85	82	87	84	81	79
1.25		96	91	88	95	91	87	93	89	86	91	88	85	83
1.5		99	95	92	98	94	91	96	92	90	94	91	89	86
2		105	101	98	103	100	97	100	98	95	98	96	94	91
2.5		108	105	103	106	104	101	103	101	99	100	99	97	94
3		110	108	106	109	107	105	105	104	102	102	101	100	96
4		113	111	109	111	109	108	107	106	105	104	103	102	98
5		115	113	112	112	111	110	108	108	107	105	104	103	99

