


姿図

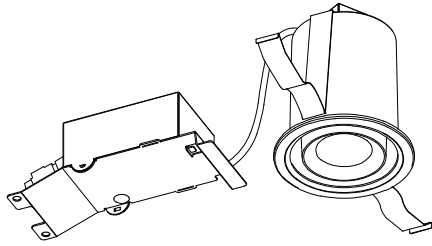

品番	DDL-5243AWG
光源	LED 5.8W 3500K Ra96
定格光束	280.0 lm
1/2照度角	33°
ビーム角	36°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.60 H B 0.60 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20			20			20			20			0	
室指数	照 明 率 (× 0.01)													
0.6	79	74	71	79	74	71	78	73	71	77	73	70	69	
0.8	85	80	77	84	80	76	83	79	76	82	78	75	74	
1	91	86	83	90	86	82	88	84	81	87	83	81	79	
1.25	95	91	87	94	90	87	92	89	86	90	87	85	83	
1.5	99	95	91	98	94	91	95	92	89	93	90	88	86	
2	104	101	98	103	99	97	100	97	95	97	95	93	90	
2.5	108	105	102	106	103	101	103	101	99	100	98	97	93	
3	110	108	106	108	106	104	105	103	102	102	101	99	96	
4	113	111	109	111	109	108	107	106	105	104	103	102	98	
5	114	113	112	112	111	110	108	107	106	105	104	103	99	

