


姿図

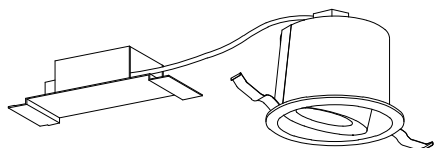

品 番	DDL-5244AWG
光 源	LED 8.5W 3500K Ra96
定格光束	420.0 lm
1/2照度角	20°
ビーム角	22°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.36 H B 0.36 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		81	77	73	81	76	73	80	76	73	79	75	73	72
0.8		87	82	79	86	82	79	85	81	78	84	80	78	76
1		92	88	84	92	87	84	90	86	83	88	85	83	81
1.25		97	92	89	96	92	89	94	90	88	92	89	87	84
1.5		100	96	93	99	95	92	96	93	91	94	92	90	87
2		105	102	99	104	101	98	101	98	96	98	96	95	92
2.5		108	106	103	107	104	102	104	102	100	101	99	98	94
3		111	109	107	109	107	105	106	104	103	103	102	100	97
4		113	112	110	111	110	109	108	107	106	104	103	103	98
5		115	114	112	113	112	111	109	108	107	105	105	104	100

