


姿図

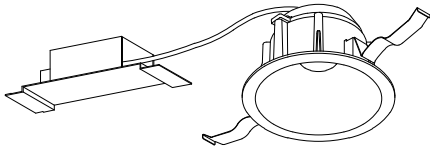

品 番	DDL-4092AWG
光 源	LED 5.8W 3500K
定格光束	400.0 lm
1/2照度角	30°
ビーム角	32°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.54 H B 0.54 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	81	76	73	80	76	73	79	75	73	79	75	72	71	
0.8	87	82	79	86	82	78	85	81	78	84	80	77	76	
1	92	88	84	91	87	84	90	86	83	88	85	83	81	
1.25	97	92	89	96	92	89	94	90	88	92	89	87	84	
1.5	100	96	93	99	95	92	96	93	91	94	92	90	87	
2	105	102	99	104	101	98	101	98	96	98	96	95	92	
2.5	108	106	103	107	104	102	104	102	100	101	99	98	95	
3	111	109	107	109	107	105	106	104	103	103	102	100	97	
4	113	112	110	111	110	108	108	107	105	104	103	103	98	
5	115	113	112	113	112	110	109	108	107	105	105	104	99	

