


姿図

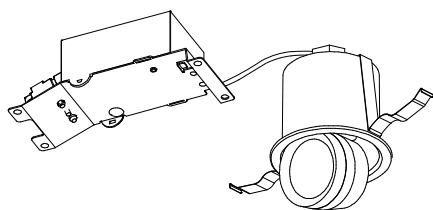

品 番	DDL-5222AWG
光 源	LED 8.5W 3500K
定格光束	830.0 lm
1/2照度角	24°
ビーム角	24°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.42 H B 0.42 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		78	73	70	78	73	70	77	73	70	76	72	69	68
0.8		84	79	76	84	79	76	82	78	75	81	77	75	73
1		90	85	82	89	85	81	88	84	81	86	83	80	78
1.25		95	90	87	94	90	86	92	88	85	90	87	84	82
1.5		98	94	91	97	93	90	95	92	89	93	90	88	85
2		104	100	97	102	99	96	100	97	95	97	95	93	90
2.5		107	104	102	106	103	101	103	100	99	100	98	97	93
3		110	108	105	108	106	104	105	103	102	102	100	99	95
4		113	111	109	111	109	107	107	106	104	104	103	102	97
5		114	113	111	112	111	110	108	107	106	105	104	103	99

