


姿図

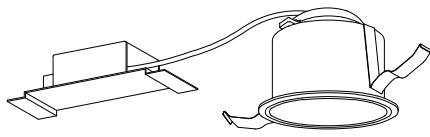

品番	DDL-4251AWG
光源	LED 5.8W 3500K
定格光束	260.0 lm
1/2照度角	29°
ビーム角	30°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.51 H B 0.51 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	82	78	75	82	78	75	81	77	74	80	77	74	73	
0.8	88	83	80	87	83	80	86	82	79	85	81	79	77	
1	93	89	86	92	88	85	91	87	84	89	86	84	82	
1.25	97	93	90	96	93	90	94	91	89	93	90	88	85	
1.5	101	97	94	99	96	93	97	94	92	95	92	90	88	
2	106	102	100	104	101	99	101	99	97	99	97	95	92	
2.5	109	106	104	107	105	103	104	102	101	101	100	98	95	
3	111	109	107	110	108	106	106	105	103	103	102	101	97	
4	114	112	110	112	110	109	108	107	106	105	104	103	99	
5	115	114	113	113	112	111	109	108	108	106	105	104	100	

