


姿図

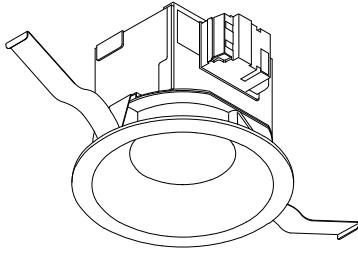

品 番	DDL-4786AWG
光 源	LED 8.5W 3500K
定格光束	820.0 lm
1/2照度角	25°
ビーム角	26°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.44 H B 0.44 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率(%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	76	70	67	75	70	67	74	70	67	73	69	66	65	
0.8	83	77	73	82	77	73	80	76	73	79	75	72	70	
1	89	83	80	88	83	79	86	82	79	84	81	78	76	
1.25	94	89	85	93	88	85	91	87	84	89	85	83	80	
1.5	97	93	89	96	92	89	94	90	87	92	89	86	84	
2	103	99	96	102	98	95	99	96	94	96	94	92	89	
2.5	107	104	101	105	102	100	102	100	98	99	97	96	92	
3	109	107	104	108	105	103	104	102	101	101	100	98	94	
4	112	110	108	110	108	107	106	105	104	103	102	101	97	
5	114	112	111	112	110	109	108	107	105	104	103	102	98	

