


姿図

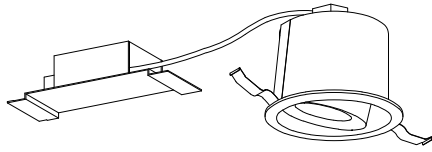

品番	DDL-4436WBG
光源	LED 8.5W 5000K
定格光束	590.0 lm
1/2照度角	30°
ビーム角	32°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.54 H
	B 0.54 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井		80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0	
	床		20			20			20			20			0
室指数	照 明 率 ( × 0.01 )														
0.6	79	75	71	79	74	71	78	74	71	77	73	71	69		
0.8	85	81	77	85	80	77	83	79	76	82	79	76	74		
1	91	86	83	90	86	82	89	85	82	87	84	81	79		
1.25	96	91	88	95	90	87	93	89	86	91	88	85	83		
1.5	99	95	92	98	94	91	95	92	90	93	91	88	86		
2	104	101	98	103	100	97	100	97	95	97	95	93	90		
2.5	108	105	102	106	103	101	103	101	99	100	98	97	94		
3	110	108	106	109	106	104	105	103	102	102	101	100	96		
4	113	111	109	111	109	108	107	106	105	104	103	102	98		
5	115	113	112	112	111	110	108	108	107	105	104	103	99		

