


姿図

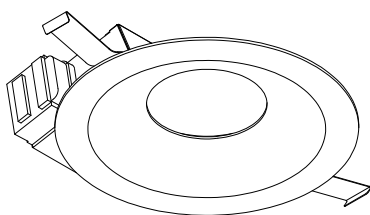

品 番	DDL-4918AWG
光 源	LED 13.4W 3500K
定格光束	1360.0 lm
1/2照度角	63°
ビーム角	100°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.21 H B 1.21 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		51	43	37	50	42	37	49	42	37	48	41	37	35
0.8		61	53	47	60	53	47	59	52	47	57	51	46	44
1		70	62	56	69	61	55	67	60	55	65	59	54	52
1.25		78	70	64	76	69	64	74	68	63	72	66	62	59
1.5		83	76	71	82	75	70	79	74	69	77	72	68	65
2		92	86	81	90	84	80	87	82	78	84	80	77	73
2.5		97	92	87	95	90	86	92	88	84	89	85	82	79
3		101	96	92	99	95	91	95	92	89	92	89	87	83
4		105	102	98	103	100	97	99	96	94	96	93	91	87
5		108	105	102	106	103	100	102	99	97	98	96	94	90

