


姿図

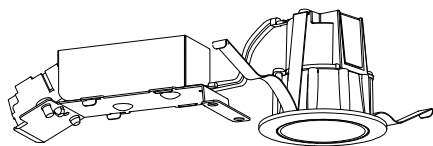

品 番	DDL-5426AW
光 源	LED 5.9W 3500K
定格光束	295 lm
1/2照度角	20°
ビーム角	20°

器具効率	100.6 %
上方光束	0.0 %
下方光束	100.6 %
器具間隔 最大限 (取付高さH)	A 0.36 H B 0.36 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		77	72	68	76	72	68	75	71	68	75	71	68	66
0.8		84	79	75	83	78	75	82	77	74	81	77	74	72
1		90	85	81	89	85	81	88	84	80	86	82	80	78
1.25		95	91	87	94	90	86	92	88	85	90	87	85	82
1.5		99	95	91	98	94	91	95	92	89	93	90	88	85
2		105	101	98	103	100	97	100	97	95	98	95	93	90
2.5		108	105	102	106	104	101	103	101	99	100	99	97	94
3		111	108	106	109	106	104	105	104	102	102	101	100	96
4		113	111	109	111	109	108	107	106	105	104	103	102	98
5		115	113	112	113	111	110	109	107	106	105	104	103	99

