


姿図



品 番	DDL-4435ABG
光 源	LED 8.5W 3500K
定格光束	590.0 lm
1/2照度角	20°
ビーム角	22°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	100.0	%		床	20			20			20			20			0
				室指数	照 明 率 (× 0.01)												
器具間隔 最大限 (取付高さH)	A	0.36 H		0.6	81	77	73	81	76	73	80	76	73	79	75	73	72
	B	0.36 H		0.8	87	82	79	86	82	79	85	81	78	84	80	78	76
			1	92	88	84	92	87	84	90	86	83	88	85	83	81	
			1.25	97	92	89	96	92	89	94	90	88	92	89	87	84	
保 守 率	良 中 否	0.67 0.63 0.56		1.5	100	96	93	99	95	92	96	93	91	94	92	90	87
			2	105	102	99	104	101	98	101	98	96	98	96	95	92	
			2.5	108	106	103	107	104	102	104	102	100	101	99	98	94	
			3	111	109	107	109	107	105	106	104	103	103	102	100	97	
			4	113	112	110	111	110	109	108	107	106	104	103	103	98	
			5	115	114	112	113	112	111	109	108	107	105	105	104	100	

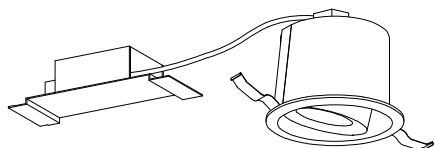