


姿図

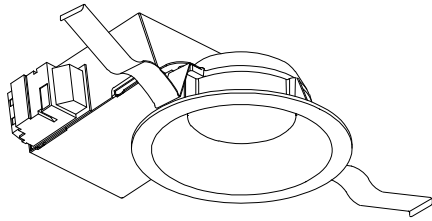

品番	DDL-8788AB
光源	LED 7.6W 3500K
定格光束	680 lm
1/2照度角	38°
ビーム角	44°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.69 H B 0.69 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	70	64	60	69	64	60	68	63	60	67	63	59	58	
0.8	78	72	68	77	71	67	76	71	67	74	70	67	65	
1	85	79	75	84	78	74	82	77	74	80	76	73	71	
1.25	91	85	81	89	84	81	87	83	80	85	82	79	76	
1.5	95	90	86	93	89	85	91	87	84	89	86	83	80	
2	101	97	93	99	96	92	97	93	91	94	91	89	86	
2.5	105	101	98	103	100	97	100	97	95	97	95	93	90	
3	108	105	102	106	103	101	102	100	98	99	98	96	92	
4	111	108	106	109	106	104	105	103	102	101	100	99	94	
5	112	110	108	110	108	107	106	105	104	103	101	100	96	

