


姿図



品 番	DDL-4752ABG
光 源	LED 5.8W 3500K
定格光束	340 lm
1/2照度角	25°
ビーム角	26°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	100.0	%		床	20			20			20			20			0
			室指数	照 明 率 (× 0.01)													
			0.6	79	75	71	79	74	71	78	74	71	77	73	71	69	
器具間隔 最大限 (取付高さH)	A	0.45 H	0.8	86	81	77	85	80	77	84	79	76	82	79	76	74	
	B	0.45 H	1	91	87	83	90	86	83	89	85	82	87	84	81	79	
			1.25	96	91	88	95	91	87	93	89	86	91	88	85	83	
保 守 率			1.5	99	95	92	98	94	91	96	92	90	94	91	89	86	
			2	104	101	98	103	100	97	100	98	95	98	96	94	91	
			2.5	108	105	103	106	104	101	103	101	99	100	99	97	94	
			3	110	108	106	109	107	105	105	104	102	102	101	100	96	
			4	113	111	109	111	109	108	107	106	105	104	103	102	98	
			5	114	113	112	112	111	110	108	107	107	105	104	103	99	

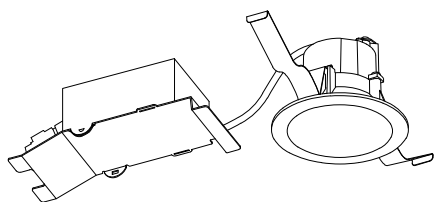