


姿図

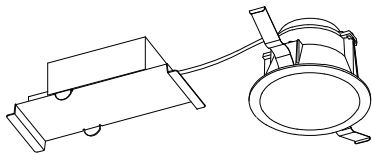

品 番	DD L-4770AWG
光 源	LED 6.9W 3500K
定格光束	510 lm
1/2照度角	49°
ビーム角	58°

器具効率	100.1 %
上方光束	0.0 %
下方光束	100.1 %
器具間隔 最大限 (取付高さH)	A 0.91 H B 0.91 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		67	61	56	66	60	56	65	60	56	64	59	56	54
0.8		75	68	64	74	68	64	73	67	63	71	66	63	61
1		82	75	71	81	75	71	79	74	70	77	73	69	67
1.25		88	82	77	86	81	77	84	80	76	82	78	75	72
1.5		92	86	82	91	86	81	88	84	80	86	82	79	76
2		99	94	90	97	93	89	94	90	87	91	88	86	83
2.5		103	99	95	101	97	94	98	95	92	95	92	90	87
3		106	102	99	104	101	98	101	98	96	97	95	93	90
4		109	106	104	107	105	102	103	101	100	100	98	97	93
5		111	109	107	109	107	105	105	104	102	101	100	99	94

