


姿図

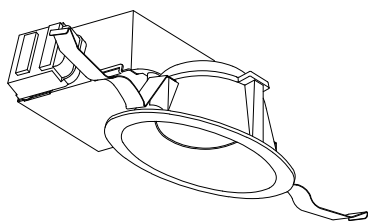

品 番	DDL-4816FWG
光 源	LED 8.4W 5000K-3500K-2700K
定格光束	650.0 lm
1/2照度角	(A37° A' 24°) B-B' 61°
ビーム角	(A53° A' 33°) B-B' 86°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.18 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		57	49	44	56	49	44	55	48	44	54	48	44	42
0.8		67	59	54	66	59	54	64	58	54	63	57	53	51
1		75	68	62	74	67	62	72	66	62	70	65	61	59
1.25		82	76	70	81	75	70	79	73	69	77	72	68	66
1.5		88	81	76	86	80	76	84	79	75	81	77	74	71
2		95	90	85	94	89	85	91	87	83	88	84	81	78
2.5		100	95	91	98	94	90	95	91	88	92	89	86	83
3		103	99	96	101	98	94	98	95	92	95	92	90	86
4		107	104	101	105	102	99	101	99	96	98	96	94	89
5		109	106	104	107	104	102	103	101	99	99	98	96	91

