


姿図

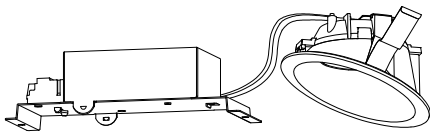

| | |
|--------|-------------------------|
| 品番 | DDL-5417YBG |
| 光源 | LED 13.4W 2700K |
| 定格光束 | 1010 lm |
| 1/2照度角 | (A37° A' 22°) B-B' 59° |
| ビーム角 | (A54° A' 28°) B-B' 84° |

| | |
|------------------------|---------------------|
| 器具効率 | 100.0 % |
| 上方光束 | 0.0 % |
| 下方光束 | 100.0 % |
| 器具間隔 最大限 (取付高さH) | A *** H B 1.13 H |
| 保守率 | 良 0.67 |
| | 中 0.63 |
| | 否 0.56 |

| 反射率 (%) | 天井 | | | | 70 | | | 50 | | | 30 | | | 0 |
|---------|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|---|
| | 壁 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| | 床 | | | | 20 | | | 20 | | | 20 | | | 0 |
| 室指数 | 照 明 率 (× 0.01) | | | | | | | | | | | | | |
| 0.6 | 58 | 51 | 46 | 58 | 51 | 46 | 57 | 50 | 46 | 56 | 50 | 46 | 44 | |
| 0.8 | 69 | 62 | 57 | 68 | 61 | 56 | 67 | 61 | 56 | 65 | 60 | 56 | 54 | |
| 1 | 77 | 70 | 65 | 76 | 70 | 65 | 74 | 69 | 64 | 73 | 68 | 64 | 62 | |
| 1.25 | 85 | 78 | 73 | 83 | 78 | 73 | 81 | 76 | 72 | 79 | 75 | 71 | 69 | |
| 1.5 | 90 | 84 | 79 | 89 | 83 | 79 | 86 | 81 | 78 | 84 | 80 | 76 | 74 | |
| 2 | 97 | 92 | 88 | 96 | 91 | 87 | 93 | 89 | 86 | 90 | 87 | 84 | 81 | |
| 2.5 | 102 | 97 | 94 | 100 | 96 | 93 | 97 | 93 | 91 | 94 | 91 | 89 | 85 | |
| 3 | 105 | 101 | 98 | 103 | 99 | 97 | 99 | 97 | 94 | 96 | 94 | 92 | 88 | |
| 4 | 108 | 105 | 102 | 106 | 103 | 101 | 102 | 100 | 98 | 99 | 97 | 95 | 91 | |
| 5 | 110 | 107 | 105 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 99 | 97 | 93 | |

