


姿図

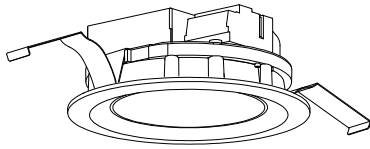

品番	DDL-5413YBG
光源	LED 6.6W 2700K
定格光束	480.0 lm
1/2照度角	64°
ビーム角	108°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.24 H
	B 1.24 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
	20			20			20			20			0		
室指数	照 明 率 (× 0.01)														
0.6	47	39	33	46	39	33	45	38	33	44	38	33	31		
0.8	57	49	42	56	48	42	55	47	42	53	46	41	39		
1	65	57	50	64	56	50	62	55	50	60	54	49	47		
1.25	73	65	59	72	64	58	70	63	57	67	61	57	54		
1.5	79	71	65	78	70	65	75	69	64	72	67	63	59		
2	88	81	75	86	80	75	83	78	73	80	76	72	68		
2.5	94	88	82	92	86	81	88	84	79	85	81	78	74		
3	98	92	88	96	91	87	92	88	84	89	85	82	78		
4	103	98	94	101	97	93	97	93	90	93	90	88	83		
5	106	102	99	104	100	97	100	97	94	96	93	91	87		

