


姿図

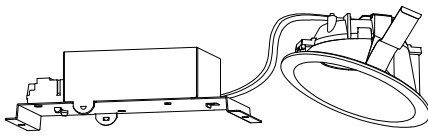

品番	DDL-5417AWG
光源	LED 13.4W 3500K
定格光束	1360 lm
1/2照度角	(A36° A' 24°) B-B' 59°
ビーム角	(A53° A' 33°) B-B' 86°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.14 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井				70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床				20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	56	49	44	55	48	43	54	48	43	53	47	43	41	
0.8	66	59	53	65	58	53	64	58	53	62	57	52	50	
1	75	67	62	74	67	62	72	66	61	70	65	60	58	
1.25	82	75	70	81	74	70	79	73	69	76	72	68	65	
1.5	87	81	76	86	80	75	83	78	74	81	77	73	70	
2	95	90	85	93	88	84	90	86	83	88	84	81	78	
2.5	100	95	91	98	94	90	95	91	88	92	89	86	82	
3	103	99	95	101	97	94	98	95	92	94	92	90	86	
4	107	103	100	105	102	99	101	98	96	97	95	93	89	
5	109	106	103	107	104	102	103	101	99	99	97	96	91	

