


姿図



品 番	DDL-4434WWG
光 源	LED 5.8W 5000K
定格光束	340.0 lm
1/2照度角	33°
ビーム角	36°

器具効率	100.0 %	反射率 (%)	天井	80			70			50			30			0
			壁	50	30	10	50	30	10	50	30	10	50	30	10	0
			床	20			20			20			20			0
上方光束	0.0 %	室指数	照 明 率 (× 0.01)													
下方光束	100.0 %	0.6	79	74	71	79	74	71	78	74	71	77	73	71	69	
器具間隔 最大限 (取付高さH)	A 0.59 H	0.8	85	80	77	85	80	77	83	79	76	82	78	76	74	
	B 0.59 H	1	91	86	83	90	86	82	88	85	82	87	84	81	79	
		1.25	96	91	88	95	90	87	93	89	86	91	88	85	83	
保 守 率	良 0.67 中 0.63 否 0.56	1.5	99	95	92	98	94	91	95	92	90	93	91	88	86	
		2	104	101	98	103	100	97	100	97	95	97	95	94	90	
		2.5	108	105	102	106	103	101	103	101	99	100	98	97	94	
		3	110	108	106	109	106	104	105	103	102	102	101	100	96	
		4	113	111	109	111	109	108	107	106	105	104	103	102	98	
		5	114	113	112	112	111	110	108	107	107	105	104	103	99	

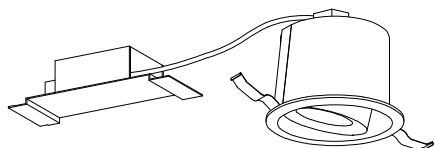