


姿図



品 番	DDL-4760WBG
光 源	LED 5.8W 5000K
定格光束	390 lm
1/2照度角	33°
ビーム角	36°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	100.0	%		床	20			20			20			20			0
				室指数	照 明 率 (× 0.01)												
				0.6	79	74	71	79	74	71	78	73	71	77	73	70	69
器具間隔 最大限 (取付高さH)	A	0.60 H		0.8	85	80	77	84	80	76	83	79	76	82	78	75	74
	B	0.60 H		1	91	86	83	90	86	82	88	84	81	87	83	81	79
				1.25	95	91	87	94	90	87	92	89	86	90	87	85	83
保 守 率	良 中 否	0.67 0.63 0.56		1.5	99	95	91	98	94	91	95	92	89	93	90	88	86
				2	104	101	98	103	99	97	100	97	95	97	95	93	90
				2.5	108	105	102	106	103	101	103	101	99	100	98	97	93
				3	110	108	106	108	106	104	105	103	102	102	101	99	96
				4	113	111	109	111	109	108	107	106	105	104	103	102	98
				5	114	113	112	112	111	110	108	107	106	105	104	103	99

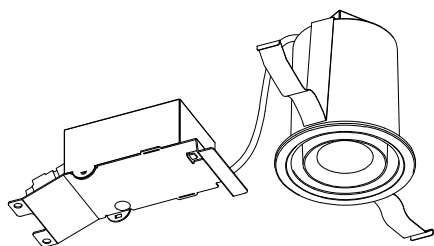