


姿図

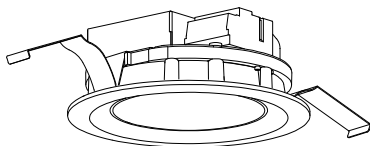

品 番	DDL-5413AWG
光 源	LED 6.6W 3500K
定格光束	495.0 lm
1/2照度角	64°
ビーム角	108°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.24 H B 1.24 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		47	39	33	46	39	33	45	38	33	44	38	33	31
0.8		57	49	42	56	48	42	55	47	42	53	46	41	39
1		65	57	50	64	56	50	62	55	50	60	54	49	47
1.25		73	65	59	72	64	58	70	63	57	67	61	57	54
1.5		79	71	65	78	70	65	75	69	64	72	67	63	59
2		88	81	75	86	80	75	83	78	73	80	76	72	68
2.5		94	88	82	92	86	81	88	84	79	85	81	78	74
3		98	92	88	96	91	87	92	88	84	89	85	82	78
4		103	98	94	101	97	93	97	93	90	93	90	88	83
5		106	102	99	104	100	97	100	97	94	96	93	91	87

