


姿図

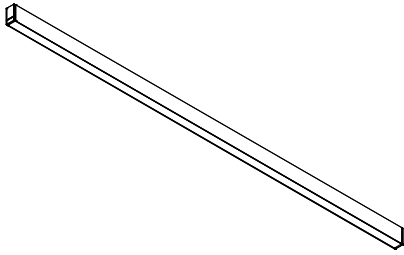

品番	LZY-93244FS_5000K
光源	LED 66W 5000K-2700K
定格光束	5800 lm
1/2照度角	A-A' 66° B-B' 63°
ビーム角	A-A' 112° B-B' 104°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.30 H
	B 1.23 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)			室指数		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
0.6	47	39	33	46	39	33	45	38	33	44	38	33	44	38	31
0.8	57	49	43	56	48	42	55	47	42	53	47	42	53	47	39
1	66	57	51	65	57	50	63	55	50	61	54	49	61	54	47
1.25	74	65	59	72	65	59	70	63	58	68	62	57	68	62	54
1.5	80	72	66	78	71	65	75	69	64	73	67	63	73	67	60
2	88	81	76	87	80	75	83	78	73	81	76	72	81	76	69
2.5	94	88	83	92	87	82	89	84	80	85	82	78	85	82	74
3	98	93	88	96	91	87	92	88	85	89	86	83	89	86	79
4	103	99	95	101	97	93	97	94	90	93	90	88	93	90	84
5	106	102	99	104	100	97	100	97	94	96	93	91	96	93	87

A-A'

B-B'

