


姿図

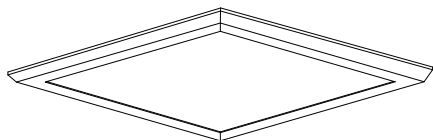

品 番	DBL-5450AW
光 源	LED 44W 3500K
定格光束	5400 lm
1/2照度角	A-A' 64° B-B' 63°
ビーム角	A-A' 106° B-B' 106°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.24 H B 1.23 H
保 守 率	良 0.63 中 0.60 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		47	39	33	46	39	33	45	38	33	44	37	33	31
0.8		57	48	42	56	48	42	54	47	42	53	46	41	39
1		65	57	50	64	56	50	62	55	49	60	54	49	46
1.25		73	65	58	72	64	58	69	63	57	67	61	56	54
1.5		79	71	65	78	70	64	75	68	63	72	67	62	59
2		88	81	75	86	79	74	83	77	73	80	75	71	68
2.5		93	87	82	91	86	81	88	83	79	85	81	77	73
3		97	92	87	95	90	86	92	87	84	88	85	82	78
4		102	98	94	100	96	92	96	93	90	93	90	87	83
5		105	102	98	103	100	96	99	96	93	95	93	91	86

A-A'

B-B'

