


姿図



品 番	DDL-5440WBG
光 源	LDF7N-H-GX53/D/700/B50K
定格光束	790 lm
1/2照度角	61°
ビーム角	96°

器具効率	85.5	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	85.5	%		床	20			20			20			20			0
			室指数	照 明 率 (× 0.01)													
			0.6	43	36	32	42	36	31	41	36	31	40	35	31	29	
器具間隔 最大限 (取付高さH)	A	1.18 H	0.8	52	45	40	51	44	40	50	44	39	48	43	39	37	
	B	1.18 H	1	59	52	47	58	51	47	56	50	46	55	50	46	43	
			1.25	66	59	54	64	58	53	62	57	53	60	56	52	50	
保 守 率	良 中 否	0.67 0.63 0.56	1.5	71	64	59	69	63	59	67	62	58	65	61	57	55	
			2	78	72	68	76	71	67	74	69	66	71	68	65	62	
			2.5	82	78	74	81	76	73	78	74	71	75	72	69	66	
			3	86	81	78	84	80	77	81	78	75	78	75	73	70	
			4	90	86	83	88	85	82	84	82	80	81	79	77	74	
			5	92	89	86	90	87	85	87	84	82	83	82	80	76	

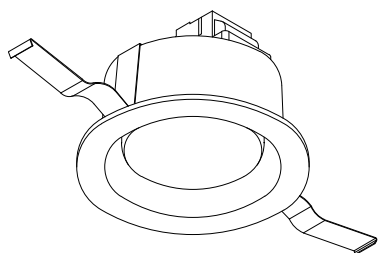