


姿図

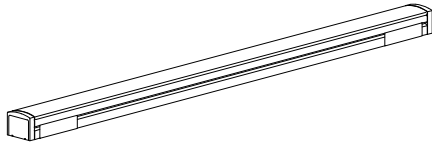

品番	DSY-4046YT
光源	LED 12.6W 2700K
定格光束	1260 lm
1/2照度角	A-A' 66° B-B' 64°
ビーム角	A-A' 110° B-B' 104°

器具効率	100.0 %
上方光束	4.3 %
下方光束	95.7 %
器具間隔 最大限 (取付高さH)	A 1.29 H
	B 1.26 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)				
	80	70	50	30	10	50	30	10	50	30	10	50	30	10
室指数	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5	6	7	8	9
照度 (lx)	47	56	64	72	78	87	92	96	101	104	38	43	47	51
照度 (lx)	38	48	56	64	70	79	86	90	94	98	32	36	40	44
照度 (lx)	33	41	49	57	64	73	80	84	89	92	29	32	37	41
照度 (lx)	29	37	44	51	59	68	74	79	84	87	27	30	34	38
照度 (lx)	27	34	41	49	57	66	72	77	82	85	25	28	32	36
照度 (lx)	25	32	39	47	55	64	70	75	80	83	23	26	30	34
照度 (lx)	23	30	37	45	53	62	68	73	78	81	21	24	28	32
照度 (lx)	21	28	35	43	51	60	66	71	76	79	19	22	26	30
照度 (lx)	19	26	33	41	49	58	64	69	74	77	17	20	24	28
照度 (lx)	17	24	31	39	47	56	62	67	72	75	15	18	22	26
照度 (lx)	15	22	29	37	45	54	60	65	70	73	13	16	20	24
照度 (lx)	13	20	27	35	43	52	58	63	68	71	11	14	18	22
照度 (lx)	11	18	25	33	41	50	56	61	66	69	9	12	16	20
照度 (lx)	9	16	23	31	39	48	54	59	64	67	7	10	14	18
照度 (lx)	7	14	21	29	37	46	52	57	62	65	5	8	12	16
照度 (lx)	5	12	19	27	35	44	50	55	60	63	3	6	10	14
照度 (lx)	3	10	17	25	33	42	48	53	58	61	1	4	8	12
照度 (lx)	1	8	15	23	31	40	46	51	56	59	0	3	6	10

A-A'

B-B'

