


姿図



品 番	DDL-8785AW
光 源	LED 4.6W 3500K
定格光束	510.0 lm
1/2照度角	25°
ビーム角	26°

器具効率	100.0 %	反射率 (%)	天井	80			70			50			30			0
			壁	50	30	10	50	30	10	50	30	10	50	30	10	0
上方光束	0.0 %		床	20			20			20			20			0
下方光束	100.0 %		室指数	照 明 率 (× 0.01)												
器具間隔 最大限 (取付高さH)	A 0.44 H		0.6	76	70	67	75	70	67	74	70	67	73	69	66	65
			0.8	82	77	73	82	77	73	80	76	73	79	75	72	70
	B 0.44 H		1	89	83	80	88	83	79	86	82	79	84	81	78	76
			1.25	94	89	85	93	88	85	91	87	84	89	85	83	80
保 守 率	良 0.67 中 0.63 否 0.56		1.5	97	93	89	96	92	89	94	90	87	92	89	86	84
			2	103	99	96	102	98	95	99	96	94	96	94	92	89
			2.5	107	104	101	105	102	100	102	100	98	99	97	96	92
			3	109	107	104	108	105	103	104	102	101	101	100	98	94
			4	112	110	108	110	108	107	106	105	104	103	102	101	97
			5	114	112	110	112	110	109	108	107	105	104	103	102	98

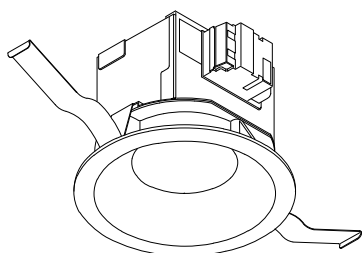