


姿図

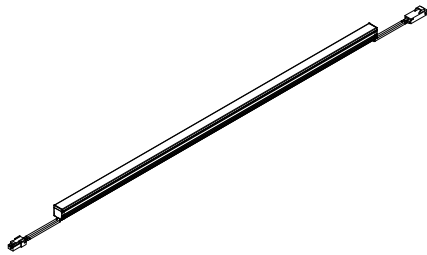

品番	DSY-5234AWE
光源	LED 10.9W 3500K
定格光束	482 lm
1/2照度角	A-A' 64° B-B' 64°
ビーム角	A-A' 110° B-B' 106°

器具効率	100.0 %
上方光束	2.1 %
下方光束	97.9 %
器具間隔 最大限 (取付高さH)	A 1.24 H B 1.24 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)				
	80	70	50	30	10	50	30	10	50	30	10	50	30	10
室指数	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5	6	7	8	9
照度 (lx)	46	56	64	72	78	86	92	96	101	104	38	47	55	63
照度 (lx)	38	47	55	63	70	79	86	91	97	100	32	41	49	57
照度 (lx)	32	41	49	57	63	72	79	84	89	92	29	37	44	51
照度 (lx)	29	37	44	51	57	65	71	77	82	83	27	34	41	47
照度 (lx)	27	34	41	47	51	59	65	71	75	75	25	31	37	43
照度 (lx)	25	31	37	43	47	55	61	66	71	71	23	29	35	41
照度 (lx)	23	29	35	41	43	51	56	61	65	65	21	27	33	39
照度 (lx)	21	27	33	39	41	49	54	59	63	63	19	25	31	37
照度 (lx)	19	25	31	37	39	47	52	57	61	61	17	23	29	35
照度 (lx)	17	23	29	35	37	45	50	55	59	59	15	21	27	33
照度 (lx)	15	21	27	33	35	43	48	53	57	57	13	19	25	31
照度 (lx)	13	19	25	31	35	43	48	53	57	57	11	17	23	29
照度 (lx)	11	17	23	29	35	43	48	53	57	57	9	15	21	27
照度 (lx)	9	15	21	27	35	43	48	53	57	57	7	13	19	25
照度 (lx)	7	13	19	25	35	43	48	53	57	57	5	11	17	23
照度 (lx)	5	11	17	23	35	43	48	53	57	57	3	9	15	21
照度 (lx)	3	9	15	21	35	43	48	53	57	57	1	7	13	19

A-A'

B-B'

