


姿図

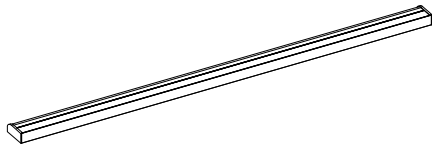

品番	DSY-4505FWG_2700K
光源	LED 34W 5000K-2700K
定格光束	3040 lm
1/2照度角	(A35° A' 30°) B-B' 62°
ビーム角	(A67° A' 43°) B-B' 98°

器具効率	100.0 %
上方光束	4.2 %
下方光束	95.8 %
器具間隔 最大限 (取付高さH)	A *** H B 1.21 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)			照 明 率 (×0.01)							
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10					
室指数	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5
	47	56	64	72	78	86	92	96	101	104	38	48	56	63	70	79	85	90	96	100
	33	41	49	57	63	73	80	85	91	96	32	41	49	56	62	72	78	83	89	94
	46	55	63	70	76	84	89	93	98	101	44	53	60	67	72	80	85	89	93	97
	37	46	53	61	66	75	80	84	89	93	37	46	53	61	66	75	80	84	89	94
	32	40	48	55	61	70	76	81	86	90	32	40	48	55	61	70	76	81	86	90
	43	51	58	64	69	77	81	85	89	91	43	51	58	64	69	77	81	85	89	94
	36	45	52	59	64	72	77	81	86	89	36	45	52	59	64	72	77	81	86	90
	32	40	47	54	60	68	74	78	83	87	32	40	47	54	60	68	74	78	83	87
	29	37	44	51	56	64	69	73	78	81	29	37	44	51	56	64	69	73	78	81

