


姿図

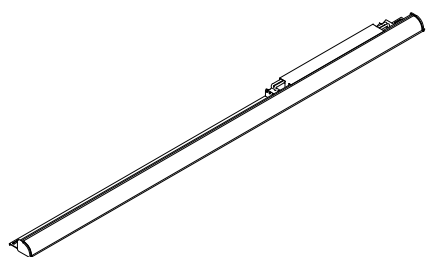

品 番

DSY-5256AWG

光 源

LED 21W 3500K

定格光束

2520 lm

1/2照度角

(A15° A' 7°) B-B' 24°

ビーム角

(A15° A' 7°) B-B' 24°

器具効率	100.0 %
上方光束	3.6 %
下方光束	96.4 %
器具間隔 最大限 (取付高さH)	A *** H B 0.42 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		73	67	63	72	67	63	71	66	63	70	65	62	61
0.8		80	74	70	79	73	69	77	72	68	75	71	68	66
1		86	80	76	84	79	75	82	78	74	80	76	73	71
1.25		91	85	81	89	84	80	87	82	79	84	81	78	75
1.5		95	89	85	93	88	85	90	86	83	87	84	81	78
2		101	96	92	99	95	91	95	92	89	92	89	87	83
2.5		104	101	97	102	99	96	99	96	93	95	93	91	87
3		107	104	101	105	102	100	101	99	97	97	95	94	89
4		110	108	105	108	106	104	104	102	100	99	98	97	92
5		112	110	108	110	108	106	105	104	102	101	100	99	93

