


姿図

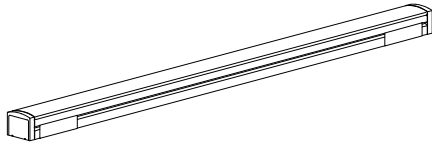

品番	DSY-4045AT
光源	LED 9.7W 3500K
定格光束	1050 lm
1/2照度角	A-A' 66° B-B' 64°
ビーム角	A-A' 110° B-B' 104°

器具効率	100.0 %
上方光束	4.3 %
下方光束	95.7 %
器具間隔 最大限 (取付高さH)	A 1.29 H
	B 1.26 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)				
	80	70	50	30	10	50	30	10	50	30	10	50	30	10
室指数	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5	6	7	8	9
照度 (lx)	47	56	64	72	78	87	92	96	101	104	38	46	55	63
照度 (lx)	38	48	56	64	70	79	86	90	94	98	32	40	49	57
照度 (lx)	33	41	49	57	63	72	79	84	89	93	29	37	44	51
照度 (lx)	29	37	44	51	56	64	70	74	79	82	27	34	41	47
照度 (lx)	27	34	41	47	51	56	60	63	66	69	25	31	37	43
照度 (lx)	25	31	37	43	47	51	54	57	60	62	23	29	34	40
照度 (lx)	23	29	34	40	43	47	50	52	54	56	21	27	32	37
照度 (lx)	21	27	32	37	40	43	45	47	49	50	19	25	30	35
照度 (lx)	19	25	30	35	37	40	42	43	44	45	17	23	28	33
照度 (lx)	17	23	28	33	35	37	39	40	41	41	15	21	26	31
照度 (lx)	15	21	26	31	33	35	36	37	38	38	13	19	24	29
照度 (lx)	13	19	24	29	31	33	34	35	35	35	11	17	22	27
照度 (lx)	11	17	22	27	29	31	32	33	33	33	9	15	20	25
照度 (lx)	9	15	20	25	27	29	30	31	31	31	7	13	18	23
照度 (lx)	7	13	18	23	25	27	28	29	29	29	5	11	16	21
照度 (lx)	5	11	16	21	23	25	26	27	27	27	3	9	14	19
照度 (lx)	3	9	14	19	21	23	24	25	25	25	1	7	12	17

A-A'

B-B'

