


姿図

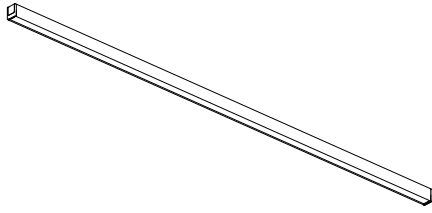



品番	DBK-40503A
光源	LED 15W 3500K
定格光束	1830.0 lm
1/2照度角	A-A' 64° B-B' 66°
ビーム角	A-A' 108° B-B' 114°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.24 H
	B 1.29 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井				70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床				20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	47	39	33	46	38	33	45	38	33	44	37	32	30	
0.8	57	48	42	56	48	42	54	47	42	53	46	41	39	
1	65	57	50	64	56	50	62	55	49	60	54	49	46	
1.25	73	65	58	72	64	58	69	63	57	67	61	57	54	
1.5	79	71	65	78	70	64	75	69	63	72	67	62	59	
2	88	81	75	86	80	74	83	78	73	80	75	72	68	
2.5	94	87	82	92	86	81	88	83	79	85	81	78	74	
3	98	92	87	96	91	86	92	88	84	89	85	82	78	
4	103	98	94	101	96	93	97	93	90	93	90	88	83	
5	106	102	99	104	100	97	99	97	94	96	93	91	86	

A-A'

B-B'

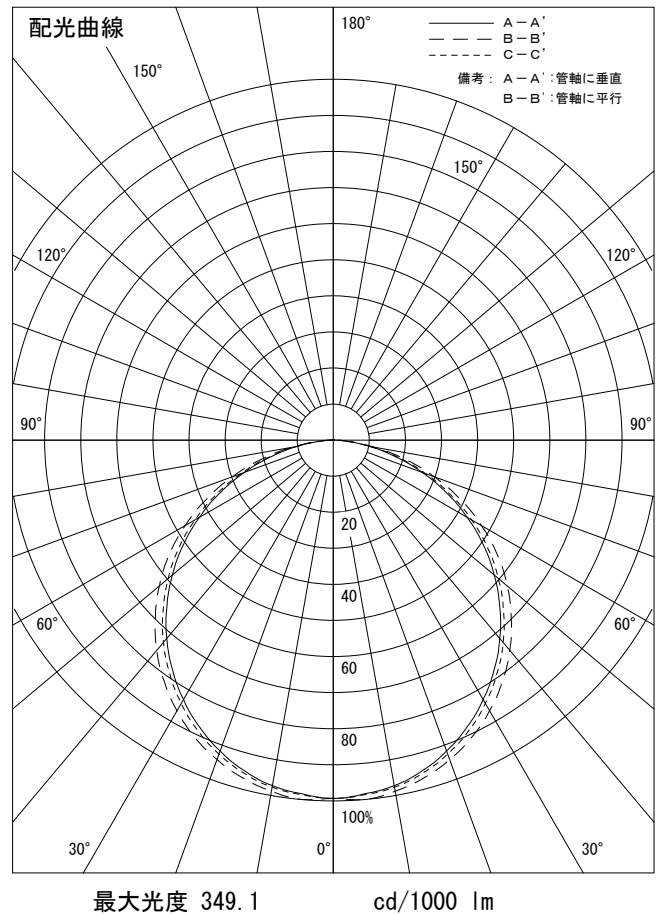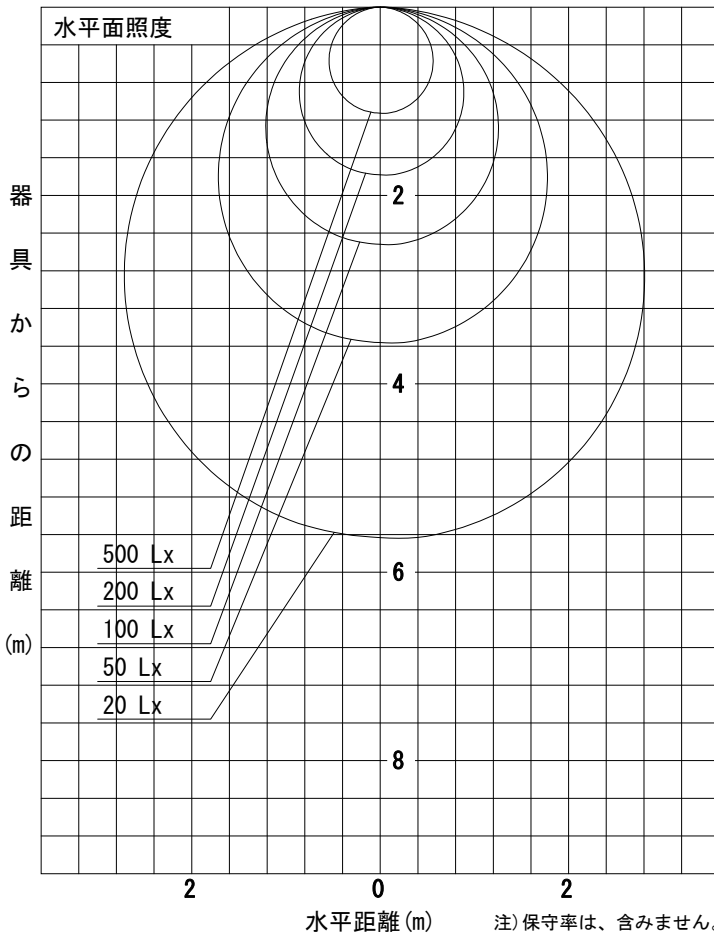

注) 保守率は、含みません。