


姿図

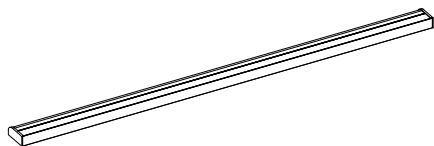

品 番	DSY-4503FWG_5000K
光 源	LED 17W 5000K-2700K
定格光束	1870 lm
1/2照度角	(A35° A' 30°) B-B' 62°
ビーム角	(A67° A' 43°) B-B' 98°

器具効率	100.0 %
上方光束	4.2 %
下方光束	95.8 %
器具間隔 最大限 (取付高さH)	A *** H B 1.21 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		47	38	33	46	38	32	44	37	32	43	36	32	29
0.8		56	48	41	55	47	41	53	46	40	51	45	40	37
1		64	56	49	63	55	49	60	53	48	58	52	47	44
1.25		72	63	57	70	62	56	67	61	55	64	59	54	51
1.5		78	70	63	76	68	62	72	66	61	69	64	60	56
2		86	79	73	84	77	72	80	75	70	77	72	68	64
2.5		92	85	80	89	83	78	85	80	76	81	77	74	69
3		96	90	85	93	88	83	89	84	81	85	81	78	73
4		101	96	91	98	94	90	93	90	86	89	86	83	78
5		104	100	96	101	97	94	96	93	90	91	89	87	81

