


姿図

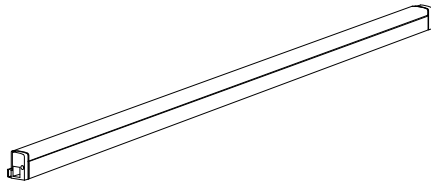

品番	DSY-4934AW
光源	LED 21W 3500K
定格光束	2510 lm
1/2照度角	A-A' 62° B-B' 61°
ビーム角	A-A' 102° B-B' 96°

器具効率	100.0 %
上方光束	8.0 %
下方光束	92.0 %
器具間隔 最大限 (取付高さH)	A 1.21 H
	B 1.18 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井	80			70			50			30			0
		壁	50	30	10	50	30	10	50	30	10	50	30	10
床		20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	47	38	33	46	38	33	44	37	32	42	36	31	29	
0.8	56	48	42	55	47	41	52	45	40	50	44	39	36	
1	64	55	49	62	55	49	60	53	47	57	51	46	43	
1.25	72	63	57	70	62	56	66	60	54	63	57	53	49	
1.5	77	69	63	75	68	62	71	65	60	68	63	58	54	
2	85	78	73	83	77	71	79	73	69	75	70	66	62	
2.5	91	85	79	88	83	78	84	79	75	79	75	72	67	
3	95	89	84	92	87	83	87	83	79	83	79	76	70	
4	100	95	91	97	93	89	91	88	85	86	84	81	75	
5	103	99	95	100	96	93	94	91	88	89	87	84	78	

A-A'

B-B'

