


姿図

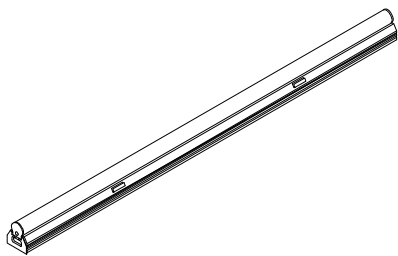

品 番

DSY-4541AS

光 源

LED 21W 3500K

定格光束

2190 lm

1/2照度角

A-A' 69° B-B' 63°

ビーム角

A-A' 152° B-B' 104°

器具効率	100.0 %
上方光束	15.0 %
下方光束	85.0 %
器具間隔 最大限 (取付高さH)	A 1.37 H B 1.23 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		41	33	27	40	32	26	38	30	25	35	29	24	21
0.8		51	41	35	49	40	34	46	38	33	43	36	31	28
1		58	49	42	56	48	41	52	45	39	49	42	37	33
1.25		66	56	49	63	55	48	59	52	46	55	49	44	39
1.5		71	62	55	69	61	54	64	57	51	59	53	49	43
2		80	72	65	77	69	63	71	65	60	66	61	57	51
2.5		85	78	72	82	76	70	76	71	66	71	66	62	56
3		90	83	77	86	80	75	80	75	71	74	70	66	59
4		95	89	84	91	86	82	85	80	77	78	75	72	64
5		99	94	89	95	90	86	88	84	81	81	78	76	67

A-A'

B-B'

